

MC 350

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

PROPORTIONAL TELESCOPIC BOOM

REMOVABLE COUNTERWEIGHTS

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB
- HYDRAULIC EXTENSION
- BENDABLE MANUAL JIB
- MANUAL EXTENSION
- NON-MARKING TIRES
- FRONT OUTRIGGERS
- RADIO REMOTE CONTROL
- HYDRAULIC FORKS
- MAN BASKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING




Technical features


Max Capacity kg	 35,000
Dimensions mm	 5170x2250x2295

	Front-wheels drive. 2 electric motors AC 12 kW 96V Insulation class H	LMI.	Electronic safe load indicator and tilting moment limiter
	Total Kg. 31,300 Removable counterweights Kg. 8,700		Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels
	96 V - 1395 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 4 superelastic 355/50-20" Rear nr. 4 superelastic 355/50-20"		+60°/-6°
	Rear Steering angle -90°/+90°		Motor driven pump 1x35 kW - 96 V AC, 1x23 kW - 96 AC.


Load charts

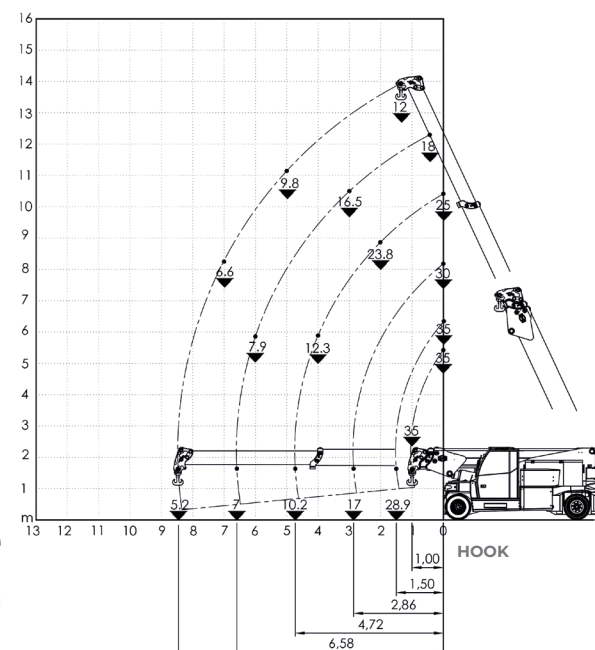

FRONT OUTRIGGERS

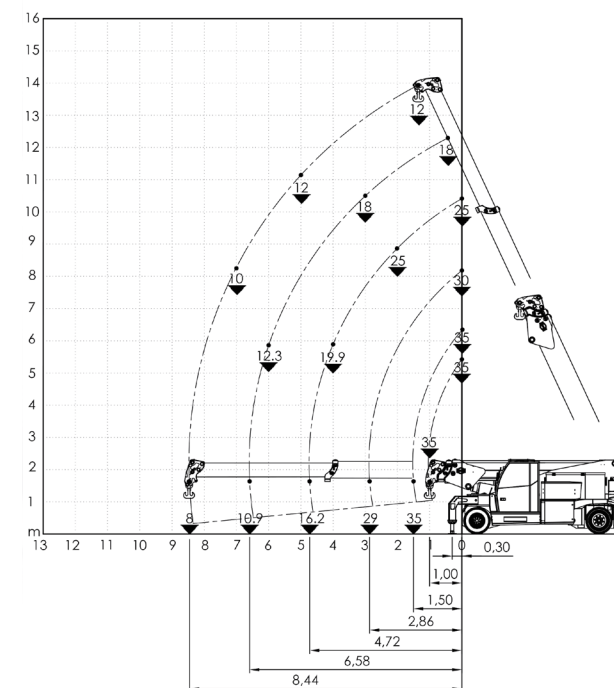


HYDRAULIC WINCH

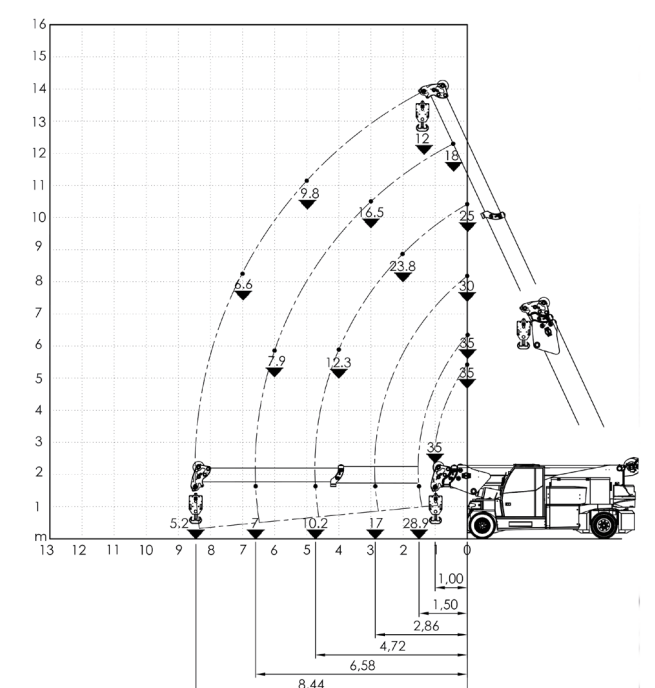

EU Standards CE

	UNI ISO 4301-1: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions

